

# A Kleene theorem for Polynomial coalgebras

Marcello Bonsangue<sup>1,2</sup>   Jan Rutten<sup>1,3</sup>   Alexandra Silva<sup>1</sup>

<sup>1</sup>Centrum voor Wiskunde en Informatica

<sup>2</sup>LIACS - Leiden University


<sup>3</sup>Vrije Universiteit Amsterdam

CIC'09

# Motivation

## Deterministic automata (DA)

- Widely used model in Computer Science.
- Acceptors of languages

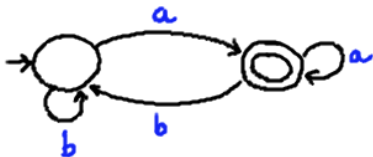

## Regular expressions


- *User-friendly* alternative to DA notation.
- Many applications: pattern matching (`grep`), specification of circuits, ...

$$b^* a (b^* a)^*$$

# Motivation

## Deterministic automata (DA)

- Widely used model in Computer Science.
- Acceptors of languages

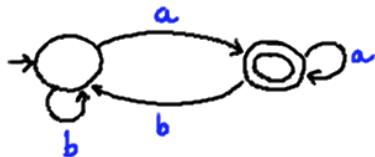

## Regular expressions

- *User-friendly* alternative to DA notation.
- Many applications: pattern matching (`grep`), specification of circuits, ...


$$b^* a (b^* a)^*$$

## Kleene's Theorem




Let  $A \subseteq \Sigma^*$ . The following are equivalent.

- 1  $A = L(\mathcal{A})$ , for some finite automaton  $\mathcal{A}$ .
- 2  $A = L(r)$ , for some regular expression  $r$ .




# Motivation

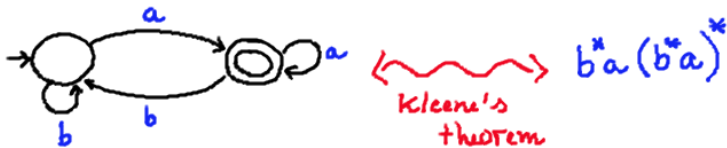

# Motivation

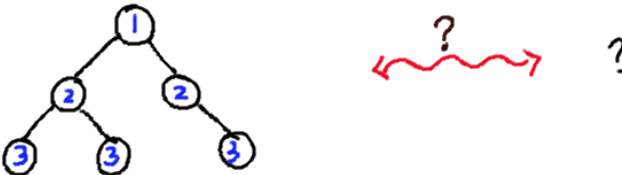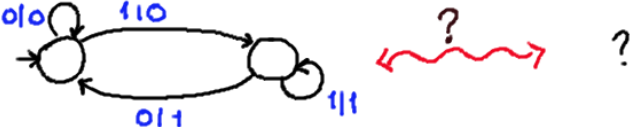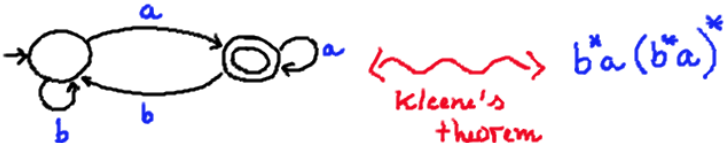


# Motivation

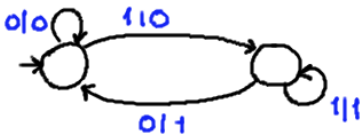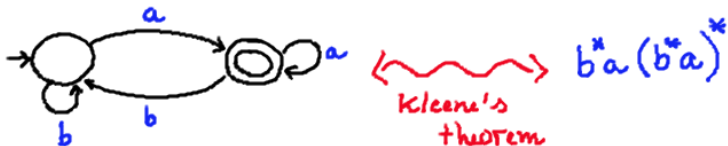

Can we fill the ? in the diagram?


# What do these things have in common?



$$(S, \delta : S \rightarrow 2 \times S^A)$$




$$(S, \delta : S \rightarrow (B \times S)^A)$$




$$(S, \delta : S \rightarrow (1 + S) \times A \times (1 + S))$$


# What do these things have in common?



$$(S, \delta : S \rightarrow 2 \times S^A)$$




$$(S, \delta : S \rightarrow (B \times S)^A)$$



$$(S, \delta : S \rightarrow (1 + S) \times A \times (1 + S))$$




# What do these things have in common?



$$(S, \delta : S \rightarrow 2 \times S^A)$$




$$(S, \delta : S \rightarrow (B \times S)^A)$$




$$(S, \delta : S \rightarrow (1 + S) \times A \times (1 + S))$$


# What do these things have in common?



$$(S, \delta : S \rightarrow 2 \times S^A)$$




$$(S, \delta : S \rightarrow (B \times S)^A)$$



$$(S, \delta : S \rightarrow (1 + S) \times A \times (1 + S))$$


# What do these things have in common?



$$(S, \delta : S \rightarrow 2 \times S^A)$$




$$(S, \delta : S \rightarrow (B \times S)^A)$$



$$(S, \delta : S \rightarrow (1 + S) \times A \times (1 + S))$$


# What do these things have in common?



$$(S, \delta : S \rightarrow 2 \times S^A)$$




$$(S, \delta : S \rightarrow (B \times S)^A)$$



$$(S, \delta : S \rightarrow (1 + S) \times A \times (1 + S))$$

$$(S, \delta : S \rightarrow GS)$$


# What do these things have in common?



$$(S, \delta : S \rightarrow 2 \times S^A)$$



$$(S, \delta : S \rightarrow (B \times S)^A)$$



$$(S, \delta : S \rightarrow (1 + S) \times A \times (1 + S))$$

$$(S, \delta : S \rightarrow GS) \quad \mathbf{G\text{-coalgebras}}$$

## Polynomial coalgebras

- Generalizations of deterministic automata
- Polynomial coalgebras: set of states  $S$  and  $t : S \rightarrow GS$

$$G ::= Id \mid B \mid G \times G \mid G + G \mid G^A$$

## Examples

- $G = 2 \times Id^A$       Deterministic automata
- $G = (B \times Id)^A$       Mealy machines
- $G = (1 + Id) \times A \times (1 + Id)$       Binary trees
- ...

## Polynomial coalgebras

- Generalizations of deterministic automata
- Polynomial coalgebras: set of states  $S$  and  $t : S \rightarrow GS$

$$G ::= Id \mid B \mid G \times G \mid G + G \mid G^A$$

## Examples

- |   |                        |
|---|------------------------|
| • $G = 2 \times Id^A$                     | Deterministic automata |
| • $G = (B \times Id)^A$                   | Mealy machines         |
| • $G = (1 + Id) \times A \times (1 + Id)$ | Binary trees           |
| • ...                                     |                        |

# In a nutshell — beyond deterministic automata



Our contributions are:

- A (syntactic) notion of  $G$ -expressions for polynomial coalgebras: each expression will denote an element of the final coalgebra.
- Equivalence between  $G$ -expressions and finite  $G$ -coalgebras (analogously to Kleene's theorem).



# In a nutshell — beyond deterministic automata



Our contributions are:

- A (syntactic) notion of  $G$ -expressions for polynomial coalgebras: each expression will denote an element of the final coalgebra.
- Equivalence between  $G$ -expressions and finite  $G$ -coalgebras (analogously to Kleene's theorem).

# G-expressions

$$E ::= \emptyset \mid \epsilon \mid E \cdot E \mid E + E \mid E^*$$


$$E_G ::= ?$$

# G-expressions

$$E ::= \emptyset \mid \epsilon \mid E \cdot E \mid E + E \mid E^*$$

$$E_G ::= ?$$

How do we define  $E_G$ ?



# G-expressions

$$\begin{array}{l} \text{Exp} \ni \varepsilon ::= \emptyset \mid \varepsilon \oplus \varepsilon \mid \mu x. \gamma \\ \mid b \qquad \qquad \qquad B \\ \mid l\langle \varepsilon \rangle \mid r\langle \varepsilon \rangle \quad G_1 \times G_2 \\ \mid l[\varepsilon] \mid r[\varepsilon] \quad G_1 + G_2 \\ \mid a(\varepsilon) \qquad \qquad \qquad G^A \end{array}$$

# G-expressions

$$\begin{array}{l} \text{Exp} \ni \varepsilon ::= \emptyset \mid \varepsilon \oplus \varepsilon \mid \mu x. \gamma \\ \mid \mathbf{b} \quad \quad \quad \mathbf{B} \\ \mid l\langle \varepsilon \rangle \mid r\langle \varepsilon \rangle \quad G_1 \times G_2 \\ \mid l[\varepsilon] \mid r[\varepsilon] \quad G_1 + G_2 \\ \mid a(\varepsilon) \quad G^A \end{array}$$

# G-expressions

$$\begin{array}{l} \text{Exp} \ni \varepsilon ::= \emptyset \mid \varepsilon \oplus \varepsilon \mid \mu x. \gamma \\ \mid \mathbf{b} \quad \quad \quad \mathbf{B} \\ \mid l\langle \varepsilon \rangle \mid r\langle \varepsilon \rangle \quad \mathbf{G}_1 \times \mathbf{G}_2 \\ \mid l[\varepsilon] \mid r[\varepsilon] \quad \mathbf{G}_1 + \mathbf{G}_2 \\ \mid a(\varepsilon) \quad \quad \quad \mathbf{G}^A \end{array}$$



# G-expressions

$$\begin{array}{l} \text{Exp} \ni \varepsilon \quad ::= \quad \emptyset \mid \varepsilon \oplus \varepsilon \mid \mu X. \gamma \\ \mid \mathbf{b} \qquad \qquad \qquad \qquad \qquad \qquad \qquad \mathbf{B} \\ \mid l\langle \varepsilon \rangle \mid r\langle \varepsilon \rangle \qquad \qquad \qquad \mathbf{G}_1 \times \mathbf{G}_2 \\ \mid l[\varepsilon] \mid r[\varepsilon] \qquad \qquad \qquad \mathbf{G}_1 + \mathbf{G}_2 \\ \mid \mathbf{a}(\varepsilon) \qquad \qquad \qquad \mathbf{G}^A \end{array}$$



# Examples

Deterministic automata expressions –  $G = 2 \times Id^A$

$$\varepsilon ::= \underbrace{\emptyset \mid \varepsilon \oplus \varepsilon \mid \mu X. \gamma}_{G}$$

# Examples

## Deterministic automata expressions – $G = 2 \times Id^A$

$$\varepsilon ::= \underbrace{\emptyset \mid \varepsilon \oplus \varepsilon \mid \mu X. \gamma}_{G} \mid \underbrace{l \langle \quad \rangle \mid r \langle \quad \rangle}_{\times}$$

# Examples

## Deterministic automata expressions – $G = 2 \times Id^A$

$$\varepsilon ::= \underbrace{\emptyset \mid \varepsilon \oplus \varepsilon \mid \mu x. \gamma}_G \mid \underbrace{l \langle \underbrace{1}_2 \rangle \mid l \langle \underbrace{0}_2 \rangle \mid r \langle \underbrace{a(\varepsilon)}_{Id^A} \rangle}_\times$$

# Examples

## Deterministic automata expressions – $G = 2 \times Id^A$

$$\varepsilon ::= \underbrace{\emptyset \mid \varepsilon \oplus \varepsilon \mid \mu x. \gamma}_G \mid \underbrace{l \langle \underbrace{1}_2 \rangle \mid l \langle \underbrace{0}_2 \rangle}_{\times} \mid r \langle \underbrace{a(\varepsilon)}_{Id^A} \rangle$$

## Mealy expressions – $G = (B \times Id)^A$

$$\varepsilon ::= \emptyset \mid \varepsilon \oplus \varepsilon \mid \mu x. \gamma \mid a \downarrow b \mid a(\varepsilon)$$

# Examples

## Deterministic automata expressions – $G = 2 \times Id^A$

$$\varepsilon ::= \underbrace{\emptyset \mid \varepsilon \oplus \varepsilon \mid \mu X. \gamma}_{G} \mid \underbrace{l \langle \underbrace{1}_{2} \rangle \mid l \langle \underbrace{0}_{2} \rangle \mid r \langle \underbrace{a(\varepsilon)}_{Id^A} \rangle}_{\times}$$

## Mealy expressions – $G = (B \times Id)^A$

$$\varepsilon ::= \emptyset \mid \varepsilon \oplus \varepsilon \mid \mu X. \gamma \mid \underbrace{a \downarrow b}_{a(l \langle b \rangle)} \mid \underbrace{a(\varepsilon)}_{a(r \langle \varepsilon \rangle)}$$

# Examples

## Deterministic automata expressions – $G = 2 \times Id^A$

$$\varepsilon ::= \underbrace{\emptyset \mid \varepsilon \oplus \varepsilon \mid \mu X. \gamma}_G \mid \underbrace{l \langle \underbrace{1}_2 \rangle \mid l \langle \underbrace{0}_2 \rangle \mid r \langle \underbrace{a(\varepsilon)}_{Id^A} \rangle}_\times$$

## Mealy expressions – $G = (B \times Id)^A$

$$\varepsilon ::= \emptyset \mid \varepsilon \oplus \varepsilon \mid \mu X. \gamma \mid \underbrace{a \downarrow b}_{a(l \langle b \rangle)} \mid \underbrace{a(\varepsilon)}_{a(r \langle \varepsilon \rangle)}$$

## Binary tree expressions – $G = (1 + Id) \times A \times (1 + Id)$

$$\varepsilon ::= \emptyset \mid \varepsilon \oplus \varepsilon \mid \mu X. \gamma \mid \underbrace{l \langle r \langle \varepsilon \rangle \rangle}_{l \langle \varepsilon \rangle} \mid \underbrace{l \langle l \langle * \rangle \rangle}_{l \uparrow} \mid a \mid \underbrace{r \langle r \langle \varepsilon \rangle \rangle}_{r \langle \varepsilon \rangle} \mid \underbrace{r \langle l \langle * \rangle \rangle}_{r \uparrow}$$

# Kleene's theorem

The goal is:

$G$  – expressions **correspond to** Finite  $G$  – coalgebras and vice-versa.  
What does it mean **correspond**?

Final coalgebras exist for Kripke polynomial coalgebras.

# Kleene's theorem

The goal is:

$G$  – expressions **correspond to** Finite  $G$  – coalgebras and vice-versa.  
What does it mean **correspond**?

Final coalgebras exist for Kripke polynomial coalgebras.

$$\begin{array}{ccc} S & \xrightarrow{h} & \Omega_G \leftarrow \llbracket \cdot \rrbracket \\ \alpha \downarrow & & \downarrow \omega_G \\ GS & \xrightarrow{Gh} & G\Omega_G \end{array} \quad \text{--- } Exp_G$$



# Kleene's theorem

The goal is:

$G$  – expressions **correspond to** Finite  $G$  – coalgebras and vice-versa.  
What does it mean **correspond**?

Final coalgebras exist for Kripke polynomial coalgebras.

$$\begin{array}{ccccc} S & \xrightarrow{h} & \Omega_G & \xleftarrow{[\cdot]} & \text{Exp}_G \\ \alpha \downarrow & & \downarrow \omega_G & & \downarrow \lambda_G \\ GS & \xrightarrow{Gh} & G\Omega_G & \xleftarrow{G[\cdot]} & G\text{Exp}_G \end{array}$$

# Kleene's theorem

The goal is:

$G$  – expressions **correspond to** Finite  $G$  – coalgebras and vice-versa.  
What does it mean **correspond**?

Final coalgebras exist for Kripke polynomial coalgebras.

$$\begin{array}{ccccc} S & \xrightarrow{h} & \Omega_G & \xleftarrow{[\cdot]} & \text{Exp}_G \\ \alpha \downarrow & & \downarrow \omega_G & & \downarrow \lambda_G \\ GS & \xrightarrow{Gh} & G\Omega_G & \xleftarrow{G[\cdot]} & G\text{Exp}_G \end{array}$$

**correspond**  $\equiv$  mapped to the same element of the final coalgebra  
 $\equiv$  **bisimilar**


# A generalized Kleene theorem

$G$ -coalgebras  $\Leftrightarrow G$ -expressions

## Theorem

- 1 Let  $(S, g)$  be a  $G$ -coalgebra. If  $S$  is finite then there exists for any  $s \in S$  a  $G$ -expression  $\varepsilon_s$  such that  $\varepsilon_s \sim s$ .
- 2 For all  $G$ -expressions  $\varepsilon$ , there exists a finite  $G$ -coalgebra  $(S, g)$  such that  $\exists_{s \in S} s \sim \varepsilon$ .

# Proof by example I

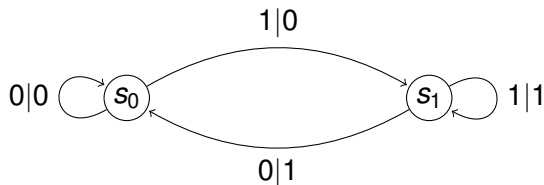

$$x_0 = 0(x_0) \oplus 0 \downarrow 0 \oplus 1(x_1) \oplus 1 \downarrow 0$$

$$x_1 = 0(x_0) \oplus 0 \downarrow 1 \oplus 1(x_1) \oplus 1 \downarrow 1$$


Solve the system and take the *least* solution:

$$\varepsilon_0 = \mu x_0. 0(x_0) \oplus 0 \downarrow 0 \oplus 1(\varepsilon_1) \oplus 1 \downarrow 0$$

$$\varepsilon_1 = \mu x_1. 0(x_0) \oplus 0 \downarrow 1 \oplus 1(x_1) \oplus 1 \downarrow 1$$

$$\varepsilon_0 \sim s_0 \text{ and } \varepsilon_1 \sim s_1$$

# Proof by example I

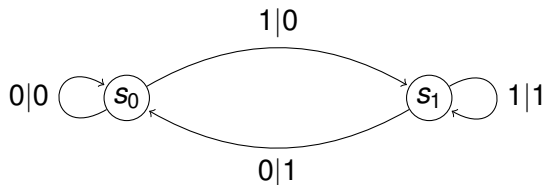

$$x_0 = 0(x_0) \oplus 0 \downarrow 0 \oplus 1(x_1) \oplus 1 \downarrow 0$$

$$x_1 = 0(x_0) \oplus 0 \downarrow 1 \oplus 1(x_1) \oplus 1 \downarrow 1$$


Solve the system and take the *least* solution:

$$\varepsilon_0 = \mu x_0. 0(x_0) \oplus 0 \downarrow 0 \oplus 1(\varepsilon_1) \oplus 1 \downarrow 0$$

$$\varepsilon_1 = \mu x_1. 0(x_0) \oplus 0 \downarrow 1 \oplus 1(x_1) \oplus 1 \downarrow 1$$

$$\varepsilon_0 \sim s_0 \text{ and } \varepsilon_1 \sim s_1$$

# Proof by example I

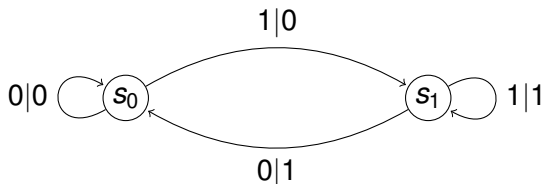

$$x_0 = 0(x_0) \oplus 0 \downarrow 0 \oplus 1(x_1) \oplus 1 \downarrow 0$$

$$x_1 = 0(x_0) \oplus 0 \downarrow 1 \oplus 1(x_1) \oplus 1 \downarrow 1$$


Solve the system and take the *least* solution:

$$\varepsilon_0 = \mu x_0. 0(x_0) \oplus 0 \downarrow 0 \oplus 1(\varepsilon_1) \oplus 1 \downarrow 0$$

$$\varepsilon_1 = \mu x_1. 0(x_0) \oplus 0 \downarrow 1 \oplus 1(x_1) \oplus 1 \downarrow 1$$

$$\varepsilon_0 \sim s_0 \text{ and } \varepsilon_1 \sim s_1$$

# Proof by example II

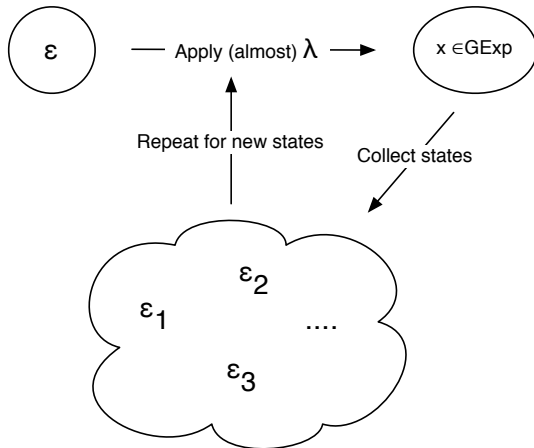

# Proof by example II

$$\varepsilon = \mu x. r \langle a(r \langle b(x) \rangle) \rangle \oplus I \langle 1 \rangle$$

$$\varepsilon \xrightarrow{\lambda_a} \langle 1, r \langle b(\varepsilon) \rangle \rangle \xrightarrow{\lambda_b} \langle 1, \varepsilon \rangle$$



# Proof by example II


$$\varepsilon = \mu x.r\langle a(r\langle b(x)\rangle)\rangle \oplus I\langle 1 \rangle$$

$$\begin{array}{ccc} \varepsilon & \xrightarrow{\lambda_a} & \langle 1, r\langle b(\varepsilon)\rangle \rangle & \xrightarrow{\lambda_b} & \langle 1, \varepsilon \rangle \\ & \searrow \lambda_b & \downarrow \lambda_a & & \\ & & \langle 0, \emptyset \rangle & & \end{array}$$

# Proof by example II

$$\varepsilon = \mu x.r\langle a(r\langle b(x)\rangle)\rangle \oplus I\langle 1 \rangle$$

$$\begin{array}{ccc} \varepsilon & \xrightarrow{\lambda_a} & \langle 1, r\langle b(\varepsilon)\rangle \rangle & \xrightarrow{\lambda_b} & \langle 1, \varepsilon \rangle \\ & \searrow \lambda_b & \downarrow \lambda_a & & \\ & & \langle 0, \emptyset \rangle & & \end{array}$$

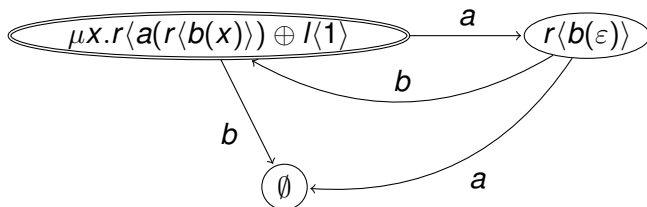

# Proof by example II

$$\varepsilon = \mu x.r\langle a(x \oplus x) \rangle$$

# Proof by example II

$$\varepsilon = \mu x.r\langle a(x \oplus x) \rangle$$

$$\varepsilon \xrightarrow{\lambda} \langle \mathbf{0}, \varepsilon \oplus \varepsilon \rangle$$

# Proof by example II

$$\varepsilon = \mu x.r\langle a(x \oplus x) \rangle$$

$$\varepsilon \xrightarrow{\lambda} \langle 0, \varepsilon \oplus \varepsilon \rangle \xrightarrow{\lambda} \langle 0, (\varepsilon \oplus \varepsilon) \oplus (\varepsilon \oplus \varepsilon) \rangle \xrightarrow{\lambda} \langle 0, (\varepsilon \oplus \varepsilon) \oplus (\varepsilon \oplus \varepsilon) \oplus (\varepsilon \oplus \varepsilon) \rangle \dots$$

# Proof by example II

$$\varepsilon = \mu x.r \langle a(x \oplus x) \rangle$$

$$\varepsilon \xrightarrow{\lambda} \langle 0, \varepsilon \oplus \varepsilon \rangle \xrightarrow{\lambda} \langle 0, (\varepsilon \oplus \varepsilon) \oplus (\varepsilon \oplus \varepsilon) \rangle \xrightarrow{\lambda} \langle 0, (\varepsilon \oplus \varepsilon) \oplus (\varepsilon \oplus \varepsilon) \oplus (\varepsilon \oplus \varepsilon) \rangle \dots$$


We need **ACI!**

# Proof by example II

$$\varepsilon = \mu x.r \langle a(x \oplus x) \rangle$$

$$\varepsilon \xrightarrow{\lambda} \langle 0, \varepsilon \oplus \varepsilon \rangle \xrightarrow{\lambda} \langle 0, (\varepsilon \oplus \varepsilon) \oplus (\varepsilon \oplus \varepsilon) \rangle \xrightarrow{\lambda} \langle 0, (\varepsilon \oplus \varepsilon) \oplus (\varepsilon \oplus \varepsilon) \oplus (\varepsilon \oplus \varepsilon) \rangle \dots$$

We need **ACI!**


$$\mu x.r \langle a(x \oplus x) \rangle \quad a$$

## Conclusions

- Language of regular expressions for Kripke polynomial coalgebras
- Generalization of Kleene theorem and Kleene algebra

## Future work

- Enlarge the class of functors treated: add  $\mathcal{P}$ ,  $\mathcal{D}$ , etc
- Axiomatization of the language
- Automation: `Circ` — Coinductive prover



## Conclusions

- Language of regular expressions for Kripke polynomial coalgebras
- Generalization of Kleene theorem and Kleene algebra

## Future work

- Enlarge the class of functors treated: add  $\mathcal{P}$ ,  $\mathcal{D}$ , etc
- Axiomatization of the language
- Automation: `Circ` — Coinductive prover

# Axiomatization

$$\left. \begin{array}{l} \varepsilon_1 \oplus \varepsilon_2 = \varepsilon_2 \oplus \varepsilon_1 \\ \varepsilon_1 \oplus (\varepsilon_2 \oplus \varepsilon_3) = (\varepsilon_1 \oplus \varepsilon_2) \oplus \varepsilon_3 \\ \varepsilon_1 \oplus \varepsilon_1 = \varepsilon_1 \\ \varepsilon \oplus \emptyset = \varepsilon \end{array} \right\} G$$

$$\left. \begin{array}{l} \mu X. \gamma = \gamma[\mu X. \gamma / X] \\ \gamma[\varepsilon / X] \leq \varepsilon \Rightarrow \mu X. \gamma \leq \varepsilon \end{array} \right\} FP$$

$$\left. \begin{array}{l} \emptyset = \perp_B \\ b_1 \oplus b_2 = b_1 \vee b_2 \end{array} \right\} B$$

Sound and complete w.r.t  $\sim$

$$\left. \begin{array}{l} l(\emptyset) = \emptyset \\ l(\varepsilon_1) \oplus l(\varepsilon_2) = l(\varepsilon_1 \oplus \varepsilon_2) \\ r(\emptyset) = \emptyset \\ r(\varepsilon_1) \oplus r(\varepsilon_2) = r(\varepsilon_1 \oplus \varepsilon_2) \end{array} \right\} G_1 \times G_2$$

Similar for  $G_1 + G_2$  and  $G^A$

# Axiomatization

$$\left. \begin{array}{l} \varepsilon_1 \oplus \varepsilon_2 = \varepsilon_2 \oplus \varepsilon_1 \\ \varepsilon_1 \oplus (\varepsilon_2 \oplus \varepsilon_3) = (\varepsilon_1 \oplus \varepsilon_2) \oplus \varepsilon_3 \\ \varepsilon_1 \oplus \varepsilon_1 = \varepsilon_1 \\ \varepsilon \oplus \emptyset = \varepsilon \end{array} \right\} G$$

$$\left. \begin{array}{l} \mu x. \gamma = \gamma[\mu x. \gamma / x] \\ \gamma[\varepsilon / x] \leq \varepsilon \Rightarrow \mu x. \gamma \leq \varepsilon \end{array} \right\} FP$$

$$\left. \begin{array}{l} \emptyset = \perp_B \\ b_1 \oplus b_2 = b_1 \vee b_2 \end{array} \right\} B$$

$$\left. \begin{array}{l} l(\emptyset) = \emptyset \\ l(\varepsilon_1) \oplus l(\varepsilon_2) = l(\varepsilon_1 \oplus \varepsilon_2) \\ r(\emptyset) = \emptyset \\ r(\varepsilon_1) \oplus r(\varepsilon_2) = r(\varepsilon_1 \oplus \varepsilon_2) \end{array} \right\} G_1 \times G_2$$

Sound and complete w.r.t  $\sim$

Similar for  $G_1 + G_2$  and  $G^A$

# Axiomatization

$$\left. \begin{aligned} \varepsilon_1 \oplus \varepsilon_2 &= \varepsilon_2 \oplus \varepsilon_1 \\ \varepsilon_1 \oplus (\varepsilon_2 \oplus \varepsilon_3) &= (\varepsilon_1 \oplus \varepsilon_2) \oplus \varepsilon_3 \\ \varepsilon_1 \oplus \varepsilon_1 &= \varepsilon_1 \\ \varepsilon \oplus \emptyset &= \varepsilon \end{aligned} \right\} G$$

$$\left. \begin{aligned} \mu X. \gamma &= \gamma[\mu X. \gamma / X] \\ \gamma[\varepsilon / X] \leq \varepsilon &\Rightarrow \mu X. \gamma \leq \varepsilon \end{aligned} \right\} FP$$

$$\left. \begin{aligned} \emptyset &= \perp_B \\ b_1 \oplus b_2 &= b_1 \vee b_2 \end{aligned} \right\} B$$

Sound and complete w.r.t  $\sim$

$$\left. \begin{aligned} l(\emptyset) &= \emptyset \\ l(\varepsilon_1) \oplus l(\varepsilon_2) &= l(\varepsilon_1 \oplus \varepsilon_2) \\ r(\emptyset) &= \emptyset \\ r(\varepsilon_1) \oplus r(\varepsilon_2) &= r(\varepsilon_1 \oplus \varepsilon_2) \end{aligned} \right\} G_1 \times G_2$$

Similar for  $G_1 + G_2$  and  $G^A$

# Axiomatization

$$\left. \begin{array}{l} \varepsilon_1 \oplus \varepsilon_2 = \varepsilon_2 \oplus \varepsilon_1 \\ \varepsilon_1 \oplus (\varepsilon_2 \oplus \varepsilon_3) = (\varepsilon_1 \oplus \varepsilon_2) \oplus \varepsilon_3 \\ \varepsilon_1 \oplus \varepsilon_1 = \varepsilon_1 \\ \varepsilon \oplus \emptyset = \varepsilon \end{array} \right\} G$$

$$\left. \begin{array}{l} \mu X. \gamma = \gamma[\mu X. \gamma / X] \\ \gamma[\varepsilon / X] \leq \varepsilon \Rightarrow \mu X. \gamma \leq \varepsilon \end{array} \right\} FP$$

$$\left. \begin{array}{l} \emptyset = \perp_B \\ b_1 \oplus b_2 = b_1 \vee b_2 \end{array} \right\} B$$

$$\left. \begin{array}{l} l(\emptyset) = \emptyset \\ l(\varepsilon_1) \oplus l(\varepsilon_2) = l(\varepsilon_1 \oplus \varepsilon_2) \\ r(\emptyset) = \emptyset \\ r(\varepsilon_1) \oplus r(\varepsilon_2) = r(\varepsilon_1 \oplus \varepsilon_2) \end{array} \right\} G_1 \times G_2$$

Sound and complete w.r.t  $\sim$

Similar for  $G_1 + G_2$  and  $G^A$

# Axiomatization

$$\left. \begin{array}{l} \varepsilon_1 \oplus \varepsilon_2 = \varepsilon_2 \oplus \varepsilon_1 \\ \varepsilon_1 \oplus (\varepsilon_2 \oplus \varepsilon_3) = (\varepsilon_1 \oplus \varepsilon_2) \oplus \varepsilon_3 \\ \varepsilon_1 \oplus \varepsilon_1 = \varepsilon_1 \\ \varepsilon \oplus \emptyset = \varepsilon \end{array} \right\} G$$

$$\left. \begin{array}{l} \mu X. \gamma = \gamma[\mu X. \gamma / X] \\ \gamma[\varepsilon / X] \leq \varepsilon \Rightarrow \mu X. \gamma \leq \varepsilon \end{array} \right\} FP$$

$$\left. \begin{array}{l} \emptyset = \perp_B \\ b_1 \oplus b_2 = b_1 \vee b_2 \end{array} \right\} B$$

$$\left. \begin{array}{l} l(\emptyset) = \emptyset \\ l(\varepsilon_1) \oplus l(\varepsilon_2) = l(\varepsilon_1 \oplus \varepsilon_2) \\ r(\emptyset) = \emptyset \\ r(\varepsilon_1) \oplus r(\varepsilon_2) = r(\varepsilon_1 \oplus \varepsilon_2) \end{array} \right\} G_1 \times G_2$$

Sound and complete w.r.t  $\sim$

Similar for  $G_1 + G_2$  and  $G^A$

# Axiomatization

$$\left. \begin{array}{l} \varepsilon_1 \oplus \varepsilon_2 = \varepsilon_2 \oplus \varepsilon_1 \\ \varepsilon_1 \oplus (\varepsilon_2 \oplus \varepsilon_3) = (\varepsilon_1 \oplus \varepsilon_2) \oplus \varepsilon_3 \\ \varepsilon_1 \oplus \varepsilon_1 = \varepsilon_1 \\ \varepsilon \oplus \emptyset = \varepsilon \end{array} \right\} G$$

$$\left. \begin{array}{l} \mu X. \gamma = \gamma[\mu X. \gamma / X] \\ \gamma[\varepsilon / X] \leq \varepsilon \Rightarrow \mu X. \gamma \leq \varepsilon \end{array} \right\} FP$$

$$\left. \begin{array}{l} \emptyset = \perp_B \\ b_1 \oplus b_2 = b_1 \vee b_2 \end{array} \right\} B$$

Sound and complete w.r.t  $\sim$

$$\left. \begin{array}{l} l(\emptyset) = \emptyset \\ l(\varepsilon_1) \oplus l(\varepsilon_2) = l(\varepsilon_1 \oplus \varepsilon_2) \\ r(\emptyset) = \emptyset \\ r(\varepsilon_1) \oplus r(\varepsilon_2) = r(\varepsilon_1 \oplus \varepsilon_2) \end{array} \right\} G_1 \times G_2$$

Similar for  $G_1 + G_2$  and  $G^A$

# Axiomatization – example

## LTS expressions – $G = 1 + (\mathcal{P}Id)^A$

$$\varepsilon ::= \emptyset \mid \varepsilon \oplus \varepsilon \mid \mu x. \gamma \mid \underbrace{\sqrt{\quad}}_{l[*]} \mid \underbrace{\delta}_{r[\emptyset]} \mid \underbrace{a.\varepsilon}_{r[a\{\varepsilon\}]}$$

$$\begin{aligned}\varepsilon_1 \oplus \varepsilon_2 &= \varepsilon_2 \oplus \varepsilon_1 \\ \varepsilon_1 \oplus (\varepsilon_2 \oplus \varepsilon_3) &= (\varepsilon_1 \oplus \varepsilon_2) \oplus \varepsilon_3 \\ \varepsilon_1 \oplus \varepsilon_1 &= \varepsilon_1 \\ \varepsilon \oplus \emptyset &= \varepsilon \\ \varepsilon \oplus \delta &= \varepsilon\end{aligned}$$

No rule

$$a.(\varepsilon_1 \oplus \varepsilon_2) = a.\varepsilon_1 \oplus a.\varepsilon_2$$

$$\begin{aligned}\mu x. \gamma &= \gamma[\mu x. \gamma / x] \\ \gamma[\varepsilon / x] \leq \varepsilon &\Rightarrow \mu x. \gamma \leq \varepsilon\end{aligned}$$



# Axiomatization – example

## LTS expressions – $G = 1 + (\mathcal{P}Id)^A$

$$\varepsilon ::= \emptyset \mid \varepsilon \oplus \varepsilon \mid \mu x. \gamma \mid \underbrace{\checkmark}_{l[*]} \mid \underbrace{\delta}_{r[\emptyset]} \mid \underbrace{a.\varepsilon}_{r[a(\{\varepsilon\})]}$$

$$\begin{aligned}\varepsilon_1 \oplus \varepsilon_2 &= \varepsilon_2 \oplus \varepsilon_1 \\ \varepsilon_1 \oplus (\varepsilon_2 \oplus \varepsilon_3) &= (\varepsilon_1 \oplus \varepsilon_2) \oplus \varepsilon_3 \\ \varepsilon_1 \oplus \varepsilon_1 &= \varepsilon_1 \\ \varepsilon \oplus \emptyset &= \varepsilon \\ \varepsilon \oplus \delta &= \varepsilon\end{aligned}$$

No rule

$$a.(\varepsilon_1 \oplus \varepsilon_2) = a.\varepsilon_1 \oplus a.\varepsilon_2$$

$$\begin{aligned}\mu x. \gamma &= \gamma[\mu x. \gamma / x] \\ \gamma[\varepsilon / x] \leq \varepsilon &\Rightarrow \mu x. \gamma \leq \varepsilon\end{aligned}$$